


VW golf mk 4 pool ball fitting instructions

© www.mr8ball.com

step 1: remove original gear knob.

The gaiter is attached to a plastic frame that is then clipped into the console. Carefully lever the frame out of the console. (push the back of the frame towards the front of the car and lift it up. You should then be able to move it back and free.

Lift the gaiter over the gear knob to reveal the securing clip. You will have to cut the clip off to release the gear knob. After removing clip simply pull the gear knob up to remove from the car.

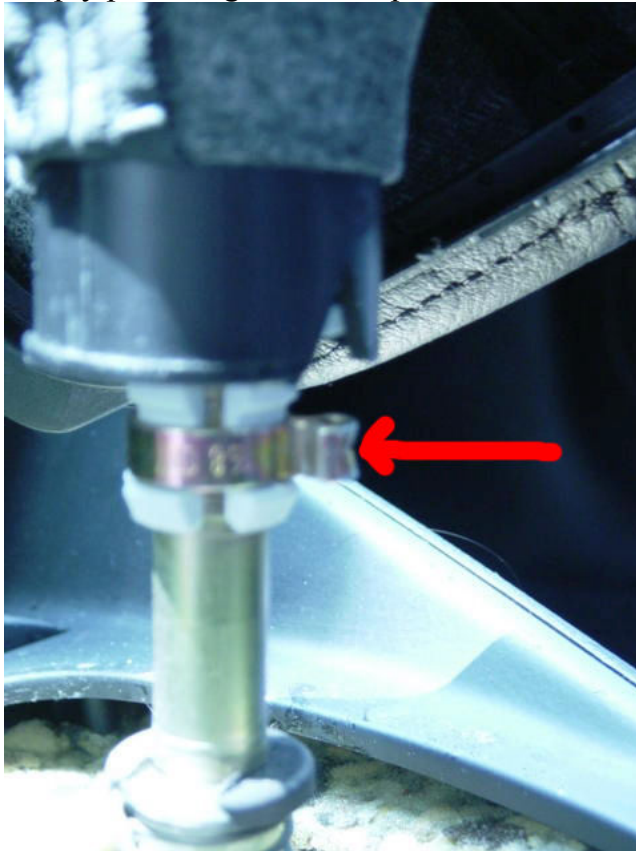

Step 2 swap gaiter to new pool ball knob.

Using a screwdriver carefully lever the plastic retainer from the gear knob. (there is a slot in the plastic, lever at this point).



Take note of how the gaiter / metal ring is arranged.



Transfer gaiter & metal ring to the pool ball knob. Make sure you have the frame orientated the same way as on the original gear knob, otherwise you may later find the pool ball faces the wrong way.



Fit the gaiter securing collar and tighten the grub screw. Make sure it is pushed down tightly against the gaiter.



Step 3: fit gear knob to car.

Put the gear knob onto the gear lever and secure with the two grub screws. The aluminium section should be placed so the grub screws are positioned at the point where the original securing clip was (where the lever is narrower).

Refit the gaiter frame to the console by slotting the front in first, and then pressing down at the rear. (reverse of removal).